



MVX 500 2T

Semi-synthetic oil for 2-stroke motorbike engines

USES

MVX 500 2T has been specifically designed for lubricating 2-stroke engines with very high working speeds, used under severe driving conditions.

Suitable for separated or mixed lubrication.

Mixture: 2% to 4 %, depending on the OEM's requirements.

Specifications:

API TC; ISO-L-EGD

JASO FD oil code 033YCO135

MAIN PHYSICAL DATA

	Methods	Units	Values
Density at 20°C	ASTM D4052	kg/m ³	869
Kinematic viscosity at 40°C	ASTM D445	mm ² /s	76
Kinematic viscosity at 100°C	ASTM D445	mm ² /s	10.9
Viscosity index	ASTM D2270		131
Pour point	ASTM D97	°C	-36
Cleveland Open Cup Flash Point	ASTM D92	°C	114
Colour		Visual	Blue


The data given in this table represents typical production values and should not be taken as specifications.

PROPERTIES & ADVANTAGES

- ▶ Prevents deposits from forming on exhaust pipes.
- ▶ Excellent protection of the engine's internal parts against rust.
- ▶ Very effective in preventing the engine from seizing.
- ▶ Dyed blue to allow easy detection in oil/fuel mixtures.
- ▶ Prevents spark plug fouling and piston rings gumming.



PRODUCT MEETING JASO M345
COMPANY GUARANTEEING
THIS PERFORMANCE
YACCO S.A.S.

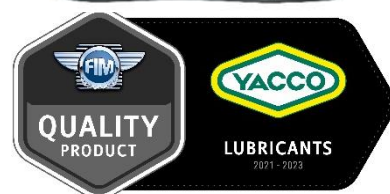

facebook.com/yaccosas

twitter.com/yaccosas

youtube.com

